
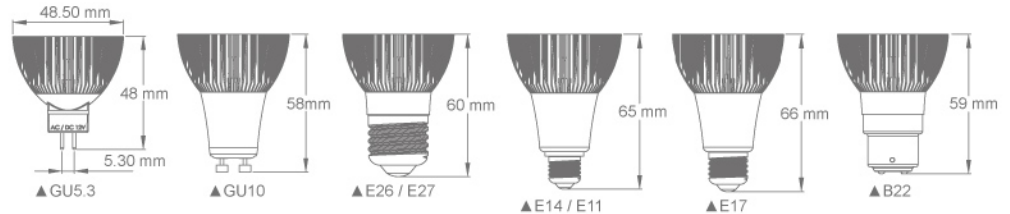


MR16 Spotlight

3W

FZL-MR16-03 Series

- Luminous Flux (lm): 120 (±10%) with 3000K / 160 (±10%) with 6000K
- Power Consumption (W): 3
- LED: Cree (1 pc)
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: 10° / 25° / 40° / 60°
- Dimmable: Non - dimmable



Model	FZL-MR16-03-WW-03 / FZL-MR16-03-CW-03							
	DC / AC 12V		AC 90 – 240V					
Input Voltage (V)	DC / AC 12V		AC 90 – 240V					
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.023 (±10%)	0.038 (±10%)	0.045 (±10%)	0.045 (±10%)	0.045 (±10%)	0.045 (±10%)	0.045 (±10%)	0.045 (±10%)

3W

FZL-MR16-04 Series

- Luminous Flux (lm): 180 (±10%) with 3000K / 230 (±10%) with 6000K
- Power Consumption (W): 3
- LED: Cree (3 pcs)
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: 15° / 25° / 40°



Model	FZL-MR16-04-WW-03 / FZL-MR16-04-CW-03							
	DC / AC 12V		AC 90 – 240V					
Input Voltage (V)	DC / AC 12V		AC 90 – 240V					
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)

Model	FZL-MR16-04-WW-03TDH / FZL-MR16-04-CW-03TDH							
	DC / AC 12V		AC 220 – 240 V (TriAC dimmable)					
Input Voltage (V)	DC / AC 12V		AC 220 – 240 V (TriAC dimmable)					
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)

Model	FZL-MR16-04-WW-03TDL / FZL-MR16-04-CW-03TDL							
	DC / AC 12V		AC 100 – 120V (TriAC dimmable)					
Input Voltage (V)	DC / AC 12V		AC 100 – 120V (TriAC dimmable)					
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)