


# Downlight




## FZL-DL08-00 Series

• Ceiling drill hole:  220 ~ 230mm

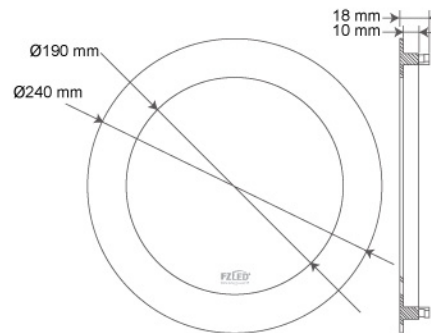

## FZL-DL10-00 Series

• Ceiling drill hole:  280 ~ 290mm

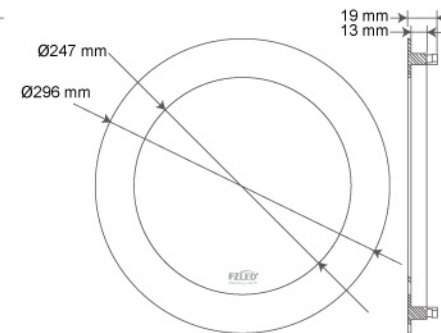

22W

### FZL-DL08-00 Series

- Luminous Flux (lm): 1150 (±10%) with 3000K / 1200 (±10%) with 4000K / 1400 (±10%) with 6000K
- Power Consumption (W): 22
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 0.66 (±10%) with driver

Model	FZL-DL08-00-WW-22 FZL-DL08-00-NW-22 FZL-DL08-00-CW-22	FZL-DL08-00-WW-22TDH FZL-DL08-00-NW-22TDH FZL-DL08-00-CW-22TDH	FZL-DL08-00-WW-22TDL FZL-DL08-00-NW-22TDL FZL-DL08-00-CW-22TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)

28W

### FZL-DL10-00 Series

- Luminous Flux (lm): 1500 (±10%) with 3000K / 1600 (±10%) with 4000K / 1800 (±10%) with 6000K
- Power Consumption (W): 28
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 1.2 (±10%) with driver

Model	FZL-DL10-00-WW-28 FZL-DL10-00-NW-28 FZL-DL10-00-CW-28	FZL-DL10-00-WW-28TDH FZL-DL10-00-NW-28TDH FZL-DL10-00-CW-28TDH	FZL-DL10-00-WW-28TDL FZL-DL10-00-NW-28TDL FZL-DL10-00-CW-28TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)