

# MR16 Spotlight

5W

## FZL-MR16-04 Series

- Luminous Flux (lm): 250 (±10%) with 3000K / 300 (±10%) with 6000K
- Power Consumption (W): 5
- LED: Cree (3 pcs)
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: 15° / 25° / 40°



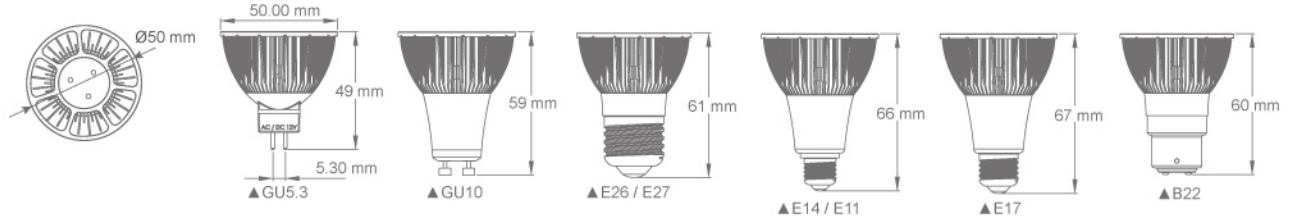
Model	FZL-MR16-04-WW-05 / FZL-MR16-04-CW-05							
Input Voltage (V)	DC / AC 12V		AC 90 – 264V					
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)

Model	FZL-MR16-04-WW-05TDH / FZL-MR16-04-CW-05TDH							
Input Voltage (V)	DC / AC 12V		AC 220 – 240 V			TriAC dimmable		
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)

Model	FZL-MR16-04-WW-05TDL / FZL-MR16-04-CW-05TDL							
Input Voltage (V)	DC / AC 12V		AC 100 – 120V			TriAC dimmable		
Socket	GU5.3	GU10	E11	E14	E17	E26	E27	B22
Net Weight (kgs)	0.025 (±10%)	0.040 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)	0.048 (±10%)



5W

## FZL-MR16-05 Series

- Luminous Flux (lm): 380 (±10%) with 3000K / 450 (±10%) with 6000K
- Power Consumption (W): 5
- LED: Cree (4 pcs)
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: 30° / 45°
- Dimmable: Non - dimmable



Model	FZL-MR16-05-WW-05 / FZL-MR16-05-CW-05
Input Voltage (V)	DC / AC 12V
Socket	GU5.3
Net Weight (kgs)	0.035 (±10%)

