

Panel Light



22W

FZL-PL30-00-22 Series (300 x 300 mm)

- Luminous Flux (lm): 1200 (±10%) with 3000K / 1300 (±10%) with 4000K / 1500 (±10%) with 6000K
- Power Consumption (W): 22
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 2.5 (±10%) with driver

Model	FZL-PL30-00-WW-22	FZL-PL30-00-WW-22TDH
	FZL-PL30-00-NW-22	FZL-PL30-00-NW-22TDH
	FZL-PL30-00-CW-22	FZL-PL30-00-CW-22TDH
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)

Model	FZL-PL30-00-WW-22TDL
	FZL-PL30-00-NW-22TDL
	FZL-PL30-00-CW-22TDL
Input Voltage (V)	AC 100 – 120V (TriAC dimmable)

52W

FZL-PL60-00-52 Series (600 x 600 mm)

- Luminous Flux (lm): 2900 (±10%) with 3000K / 3050 (±10%) with 4000K / 4200 (±10%) with 6000K
- Power Consumption (W): 52
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 5 (±10%) with driver

Model	FZL-PL60-00-WW-52	FZL-PL60-00-WW-52TDH	FZL-PL60-00-WW-52TDL
	FZL-PL60-00-NW-52	FZL-PL60-00-NW-52TDH	FZL-PL60-00-NW-52TDL
	FZL-PL60-00-CW-52	FZL-PL60-00-CW-52TDH	FZL-PL60-00-CW-52TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)


52W

FZL-PL120-00-52 Series (1200 x 300 mm)


- Luminous Flux (lm): 2900 (±10%) with 3000K / 3050 (±10%) with 4000K / 4200 (±10%) with 6000K
- Power Consumption (W): 52
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 5.2 (±10%) with driver

Model	FZL-PL120-00-WW-52	FZL-PL120-00-WW-52TDH	FZL-PL120-00-WW-52TDL
	FZL-PL120-00-NW-52	FZL-PL120-00-NW-52TDH	FZL-PL120-00-NW-52TDL
	FZL-PL120-00-CW-52	FZL-PL120-00-CW-52TDH	FZL-PL120-00-CW-52TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)

FZL-PL30-00-22 Series



FZL-PL60-00-52 Series

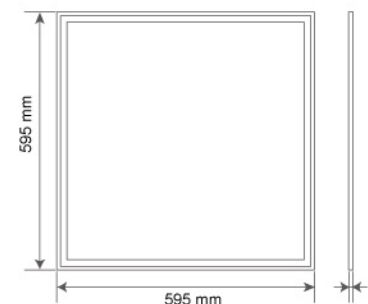

FZL-PL120-00-52 Series

